

FIG. 1

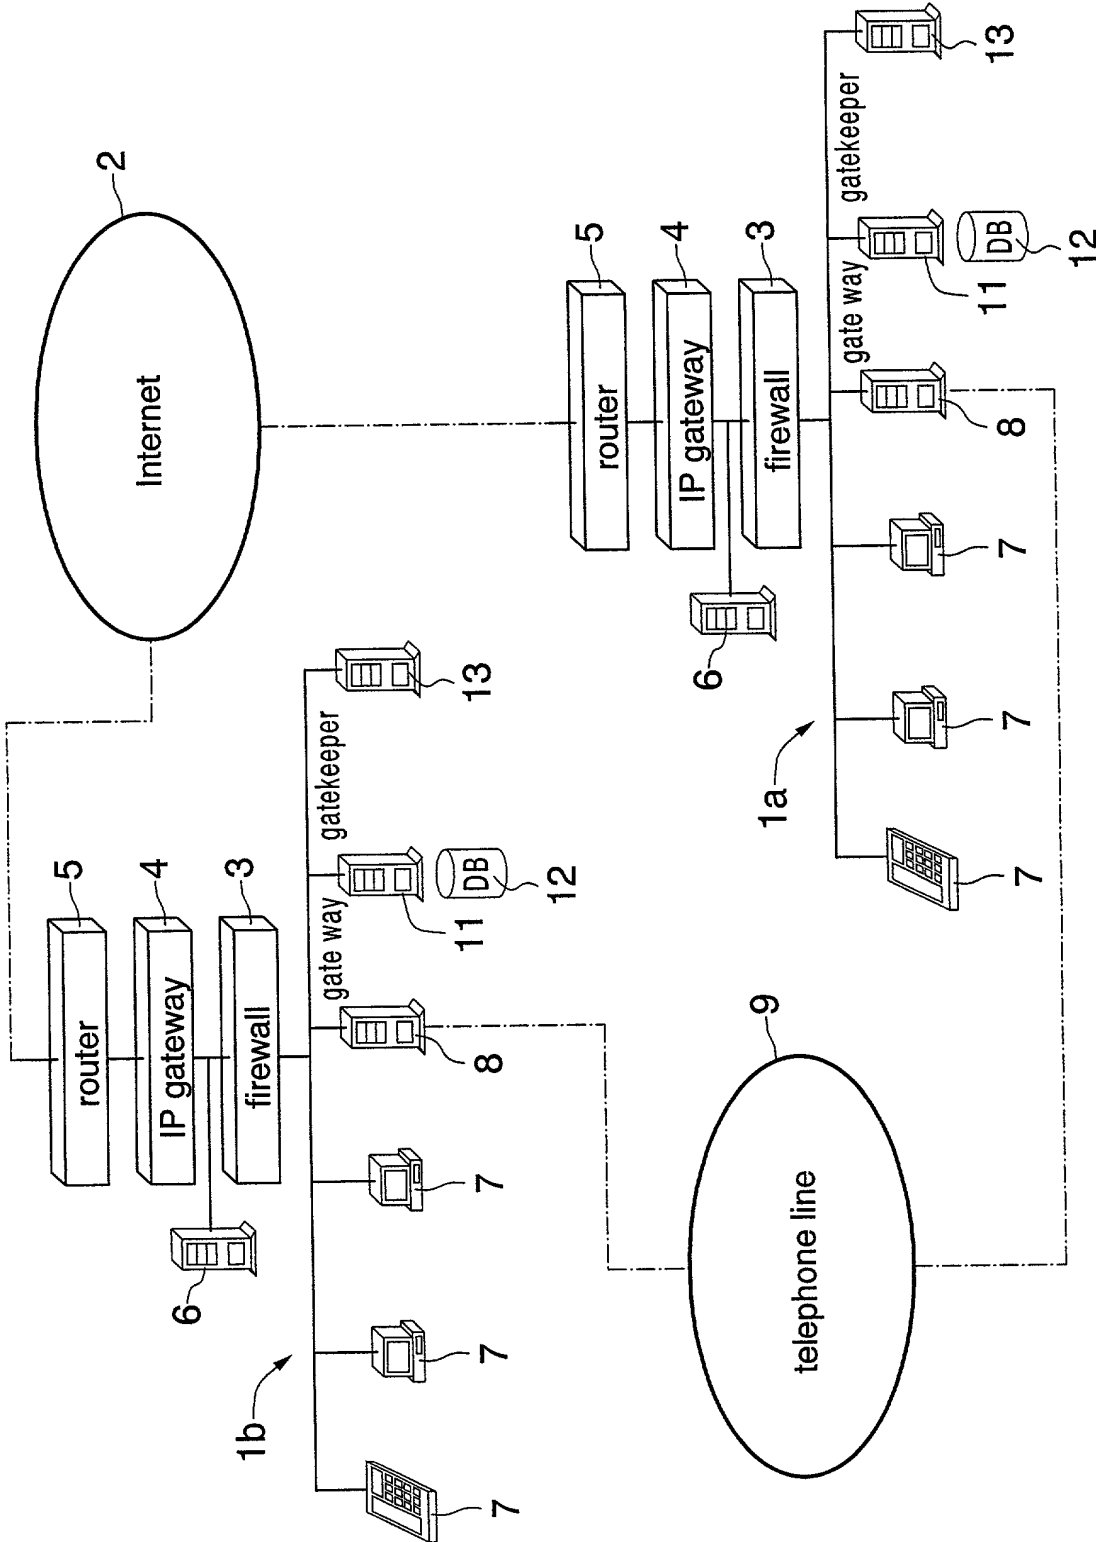


FIG. 2

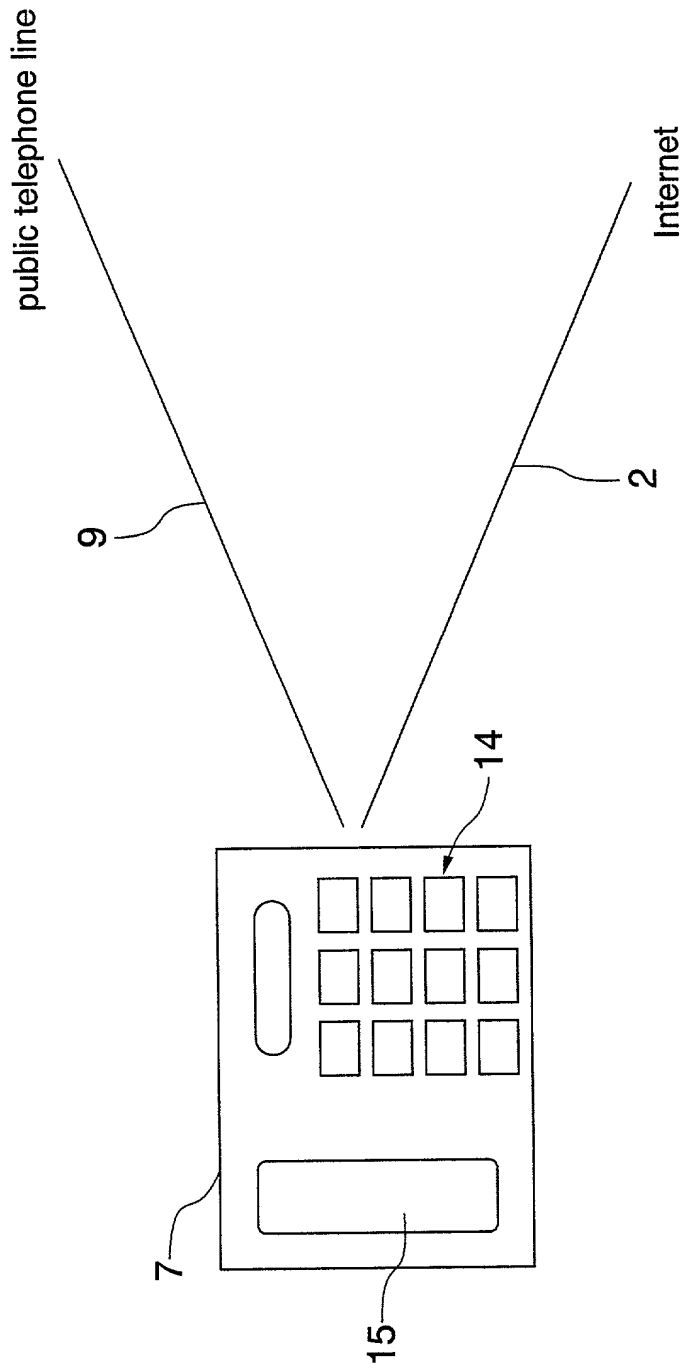


FIG. 3

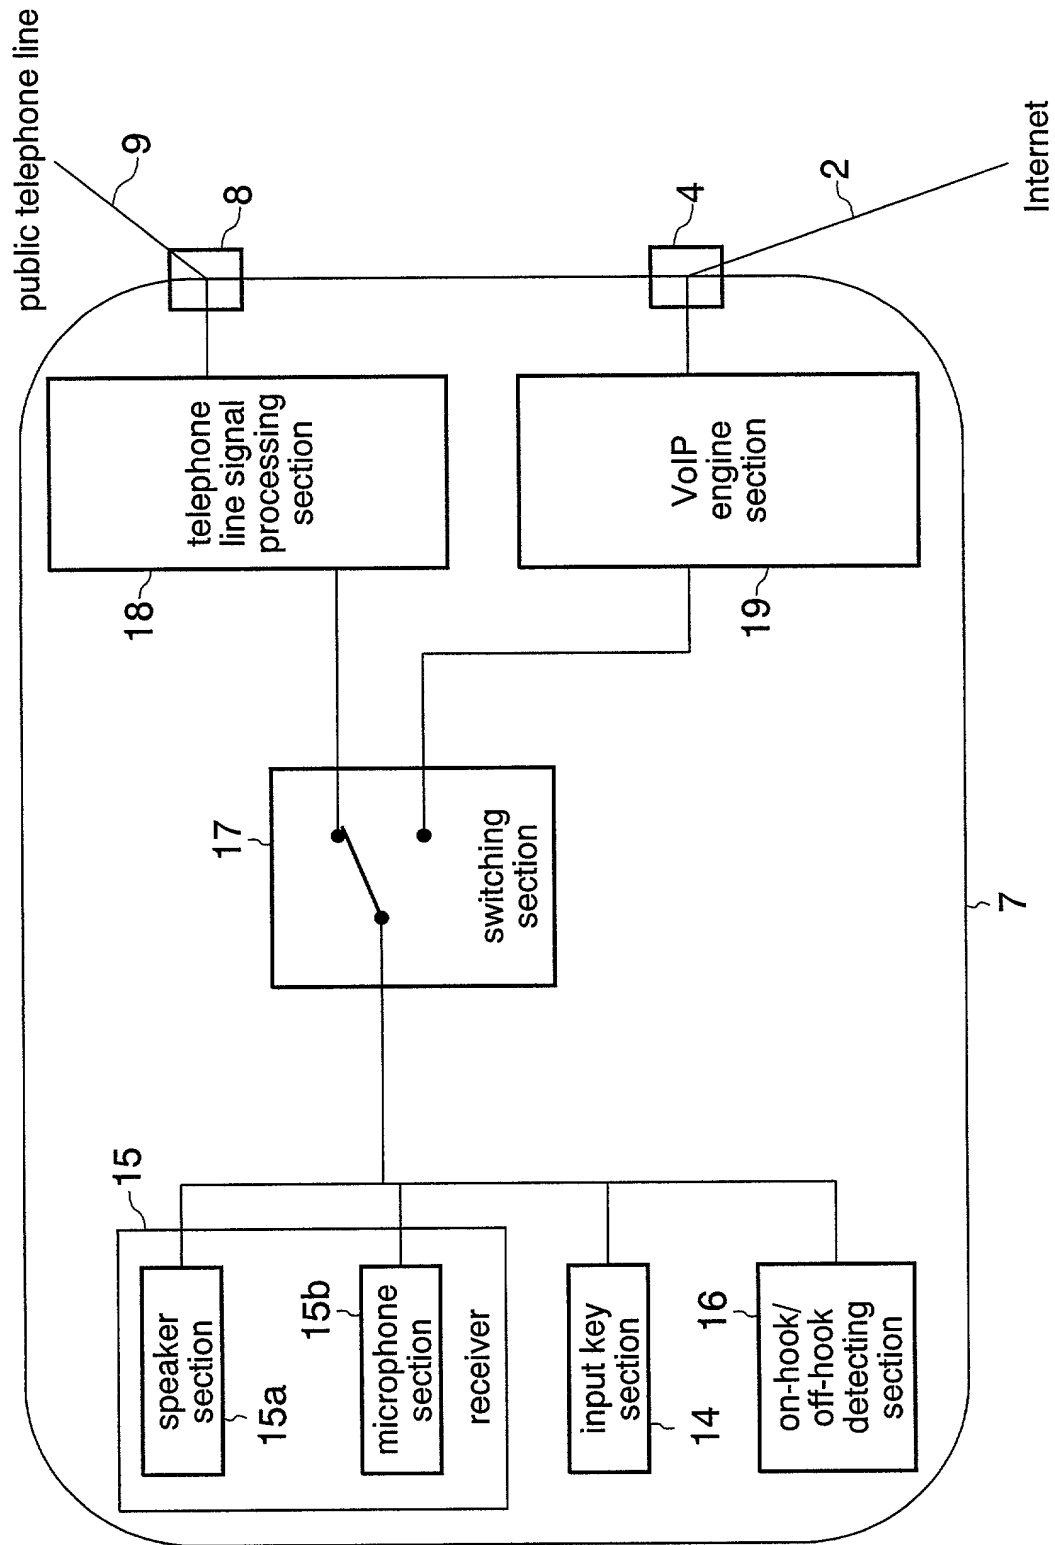


FIG. 4(a)

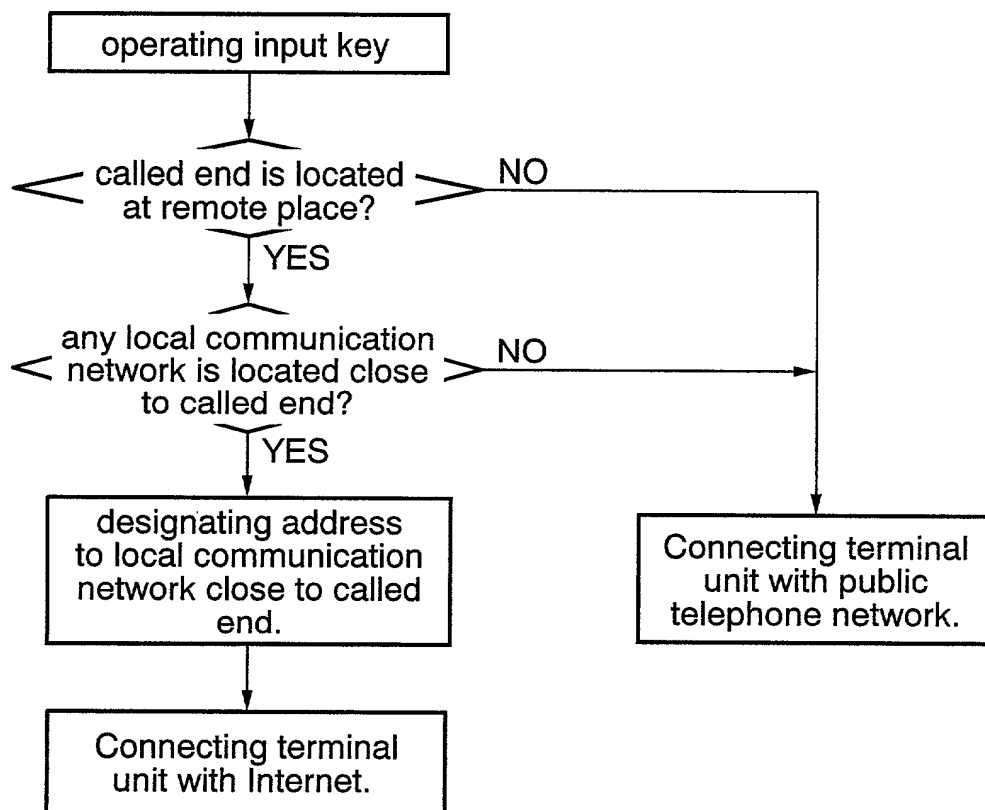


FIG. 4(b)

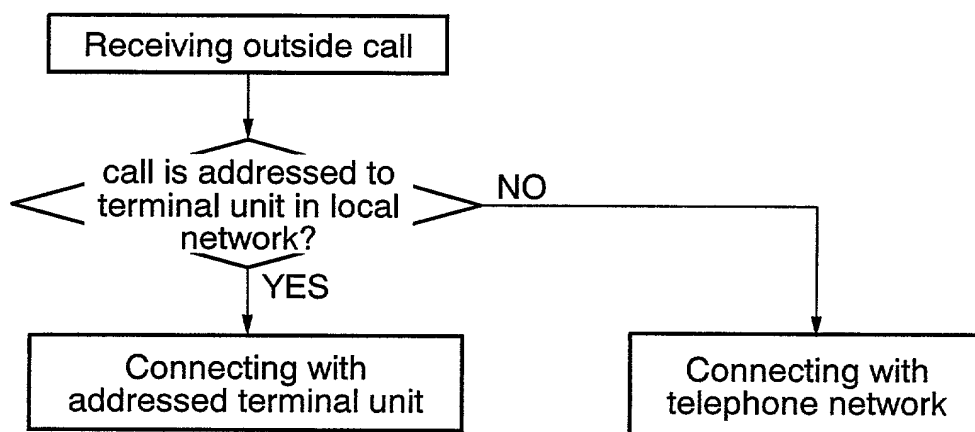


FIG. 5

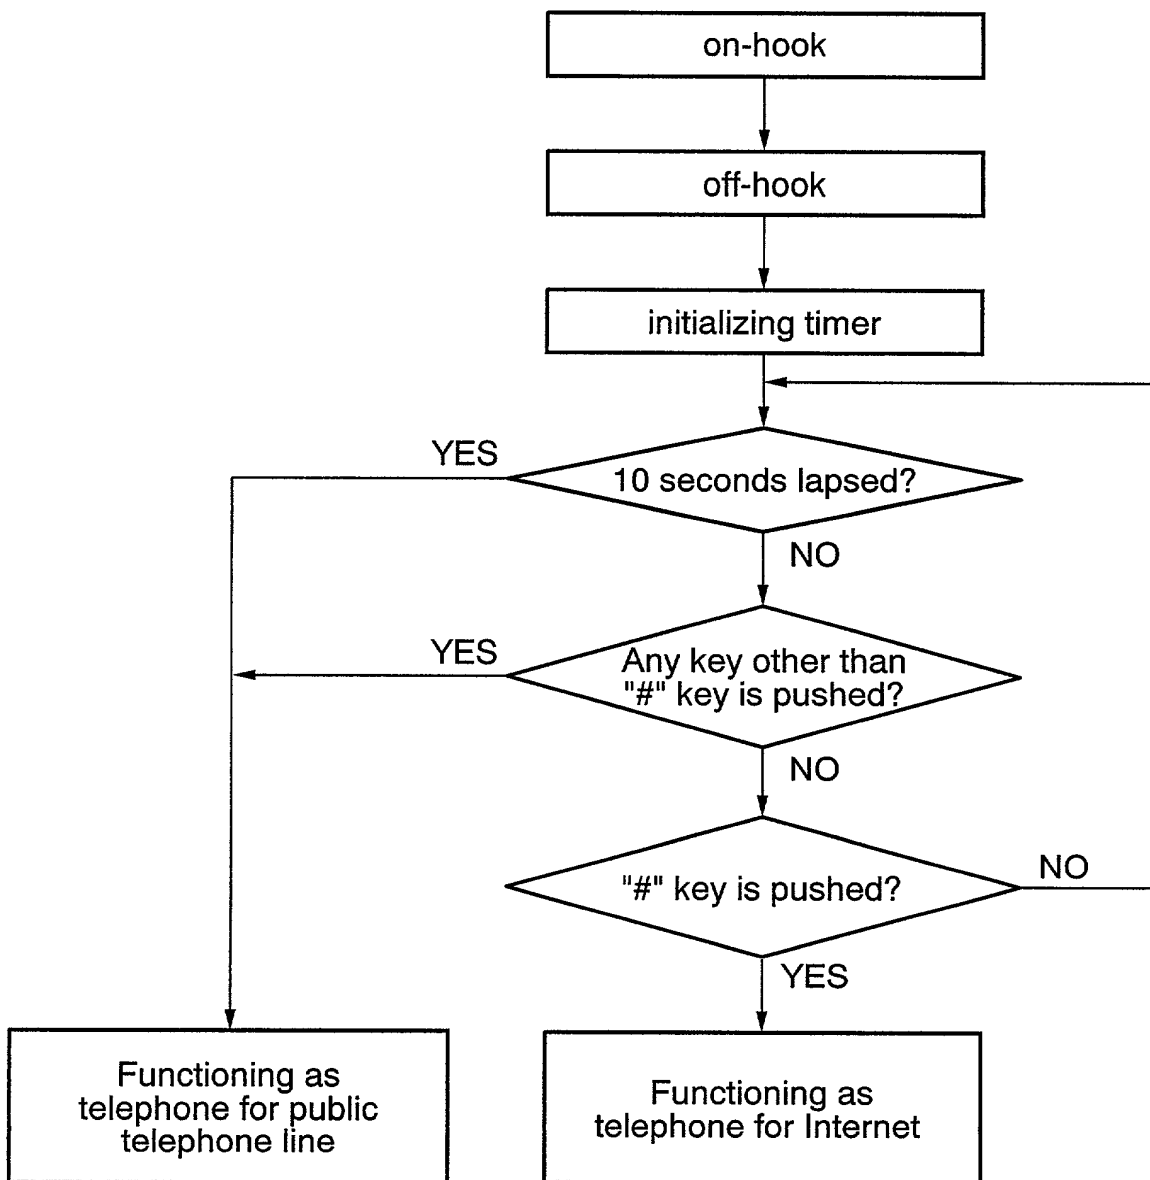


FIG. 6

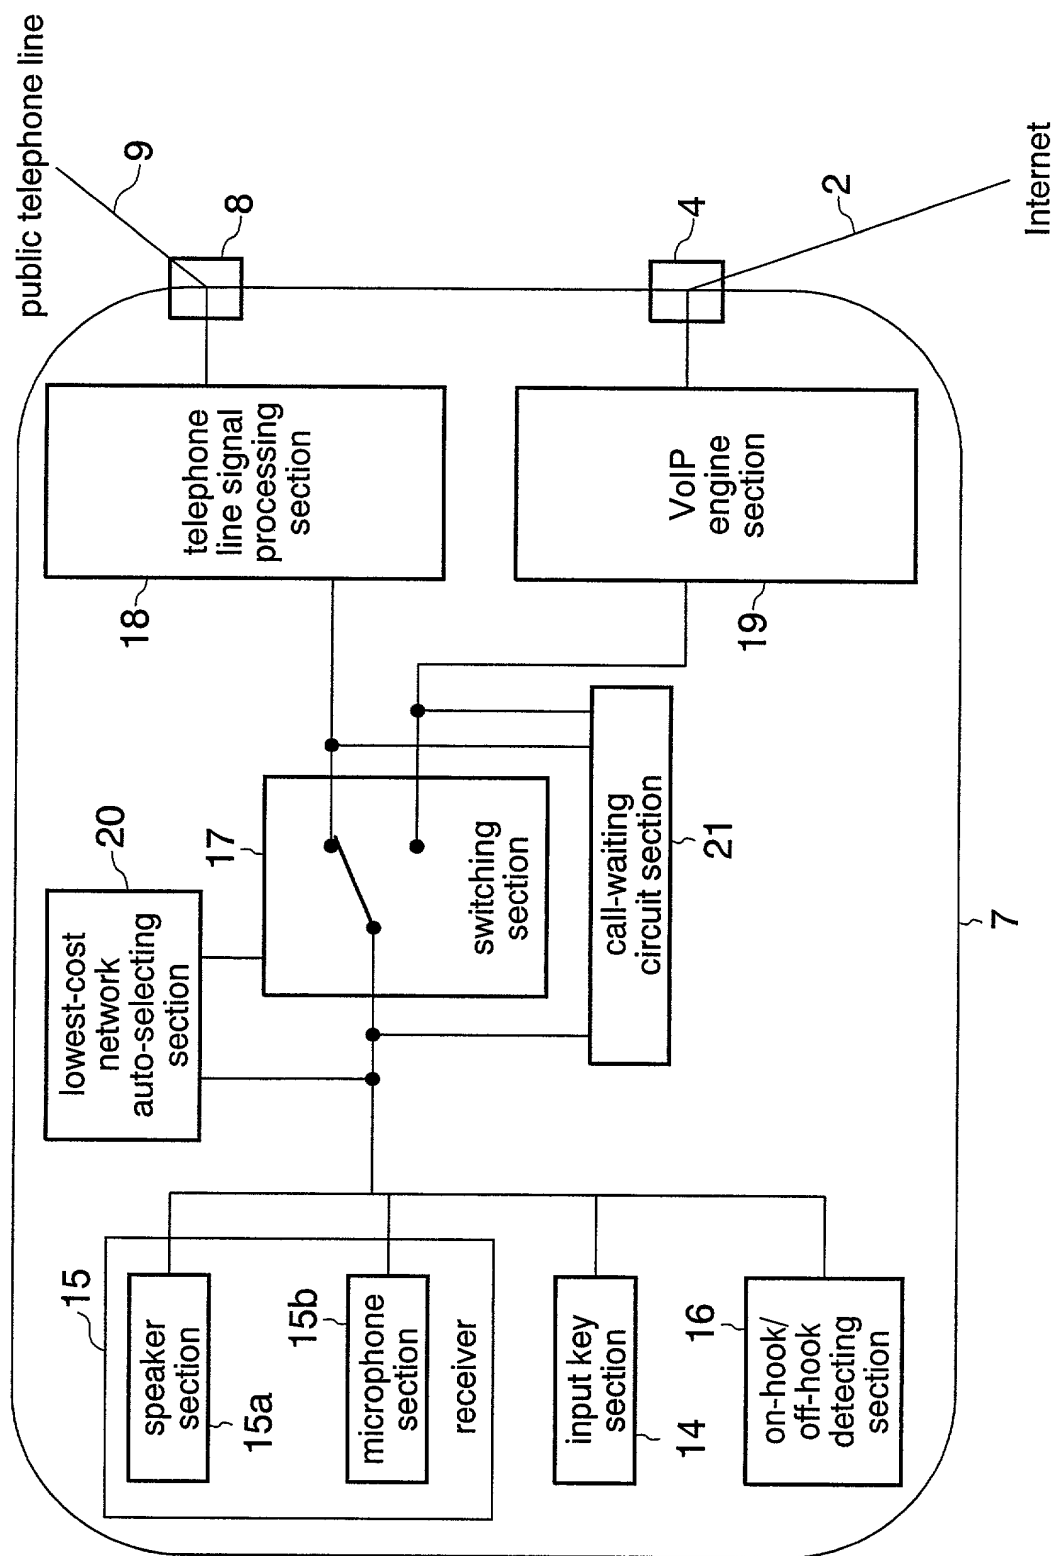


FIG. 7

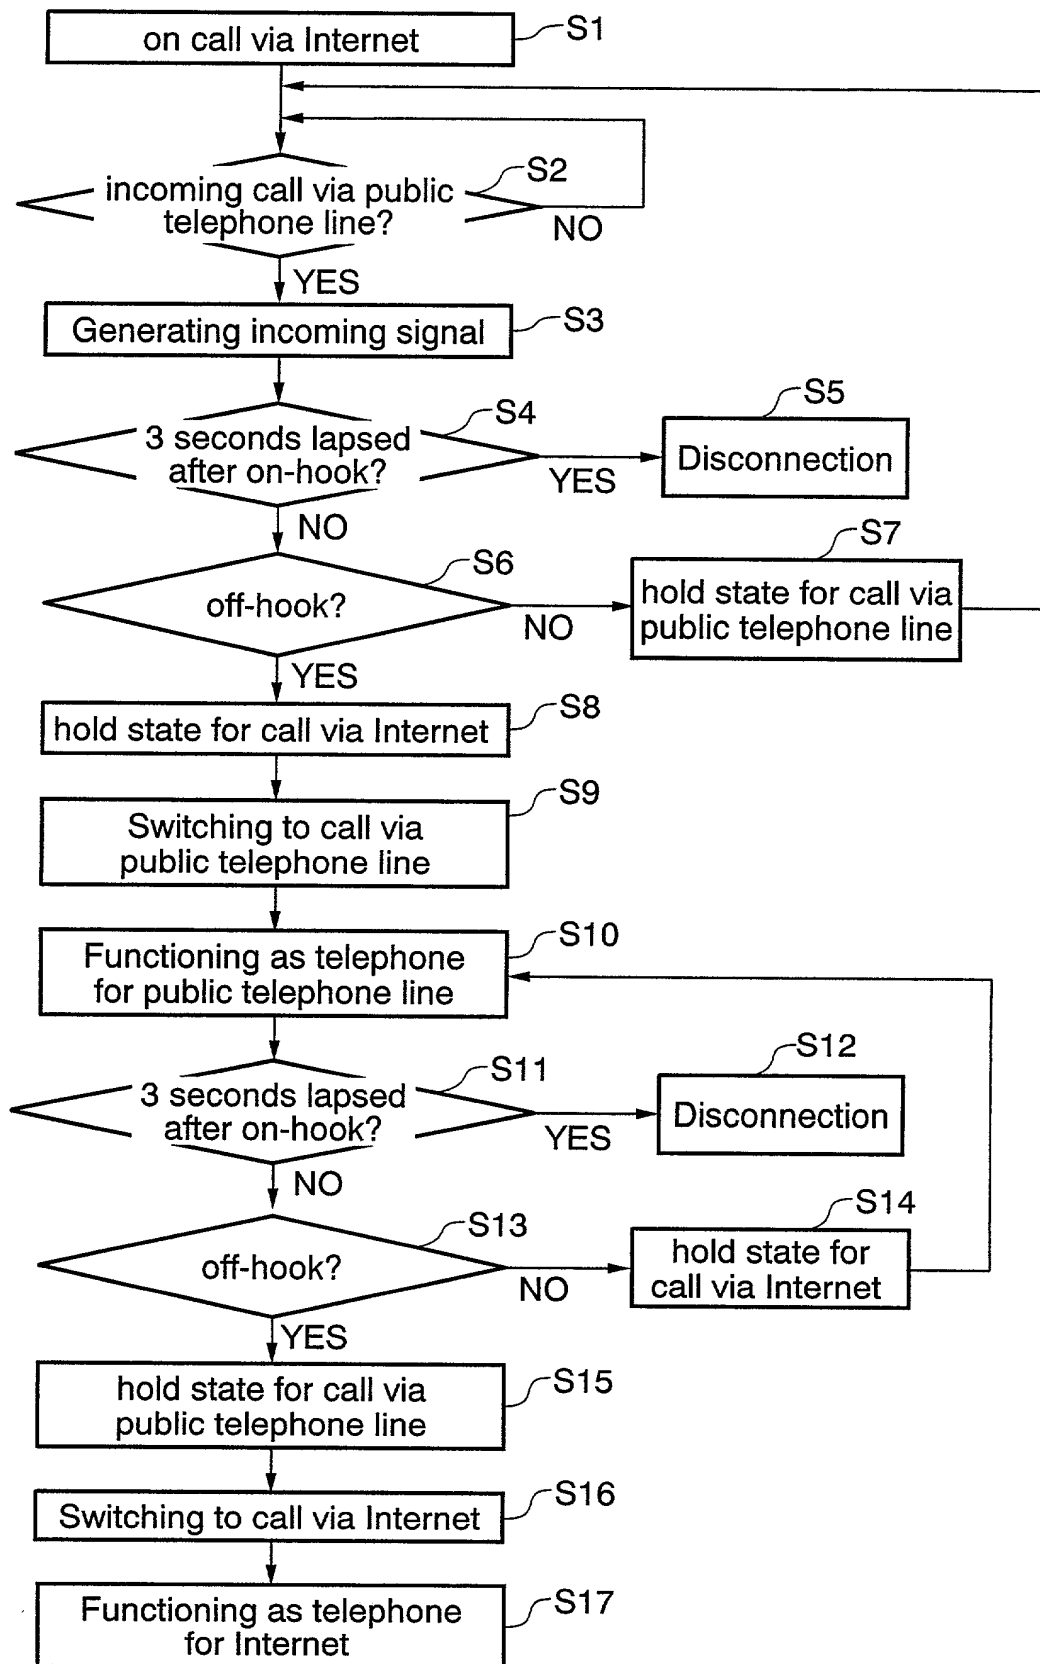


FIG. 8

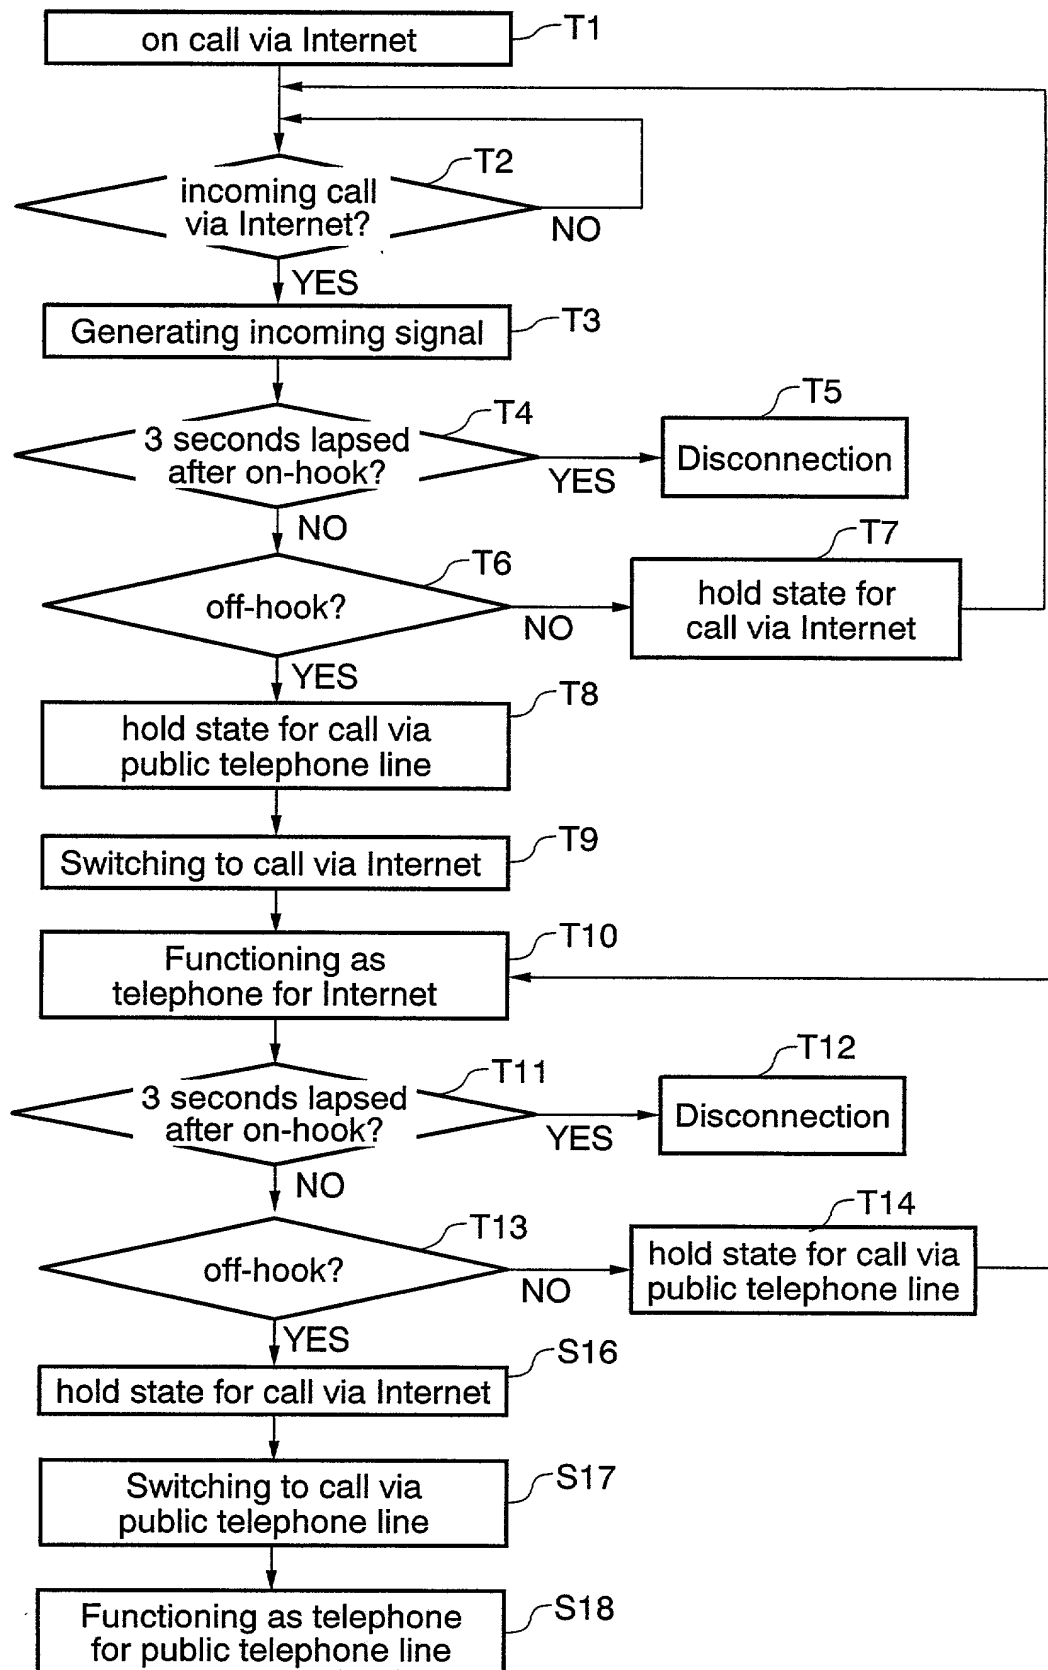


FIG. 9

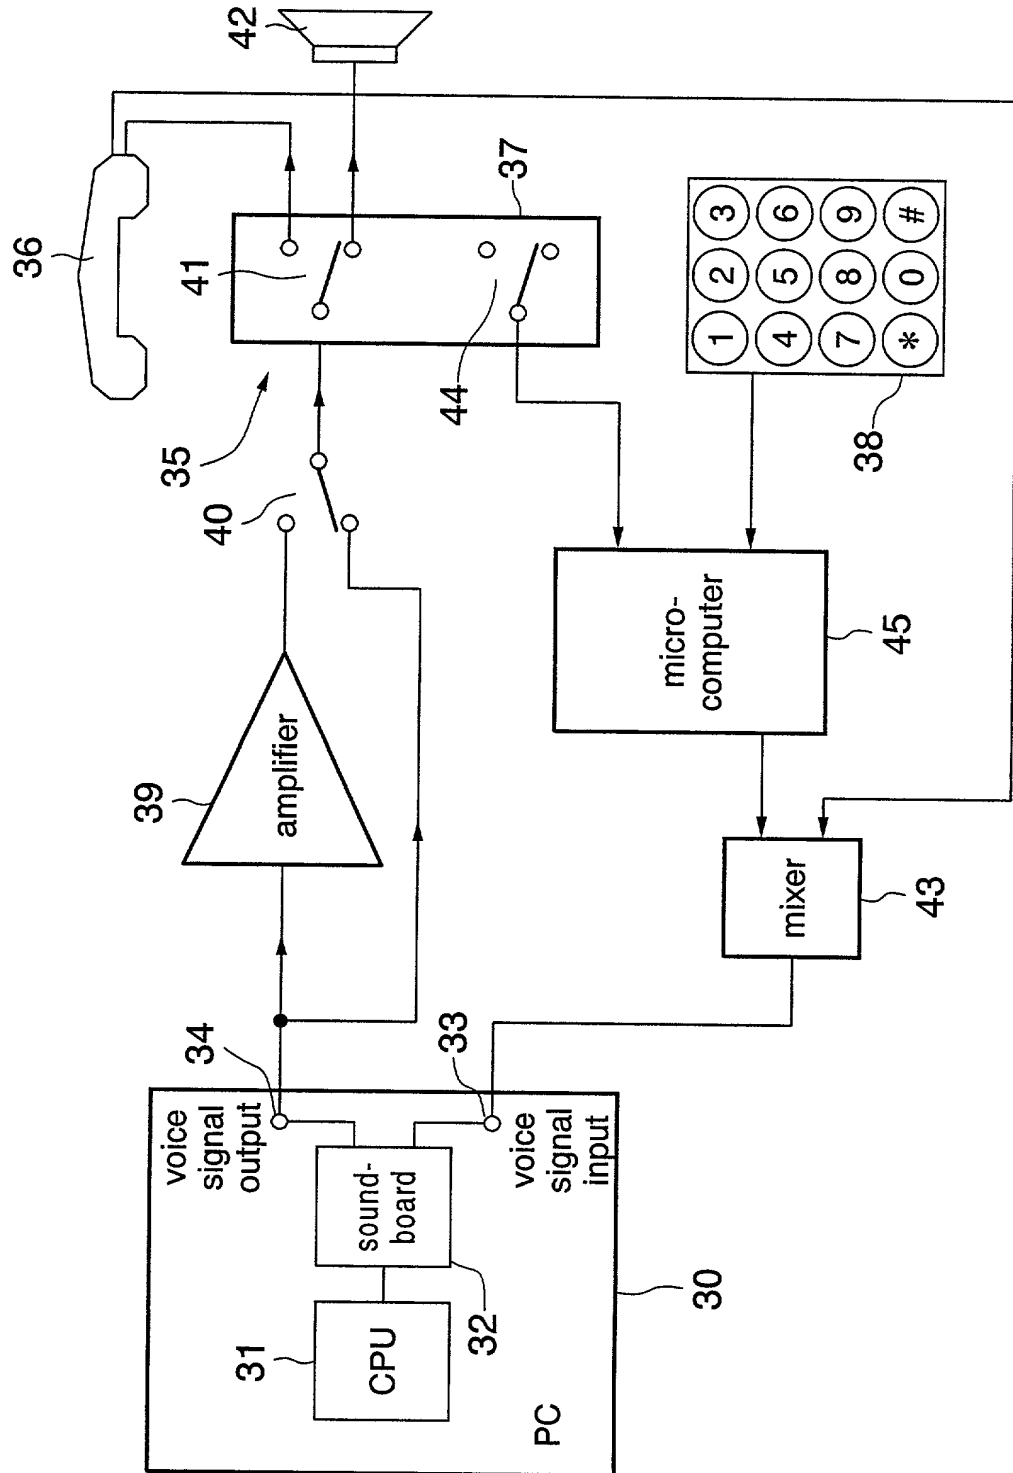


FIG. 10

	receiver set		PC application		call end
	operation	operation/state	operation	operation/state	
calling operation	off-hook	transmitting off-hook signal to AudioIN of PC			
				receiving off-hook signal/performing off-hook (transmitting) processing/transmitting dial tone to AudioOUT	
		hearing dial tone from receiver			
	dial push	transmitting DTMF to AudioIN			
				receiving and storing DTMF/stopping transmission of dial tone	
		stopping dial tone			
			click calling button	calling called end/transmitting RBT to AudioOUT	
		hearing RBT from receiver			on calling
				stopping RBT	responding
		stopping RBT			
		on call ←			→ on call

FIG. 11

	receiver set		PC application		called end
	operation	operation/state	operation	operation/state	
calling operation				transmitting calling sound from AudioOUT	calling operation
		transmitting speaker sound and calling sound			
	off-hook	transmitting off-hook signal to AudioIN of PC			
				receiving off-hook signal/performing off-hook (responding) processing / performing responding operation to called end/stopping calling sound	
		stopping calling sound/on call			on call